
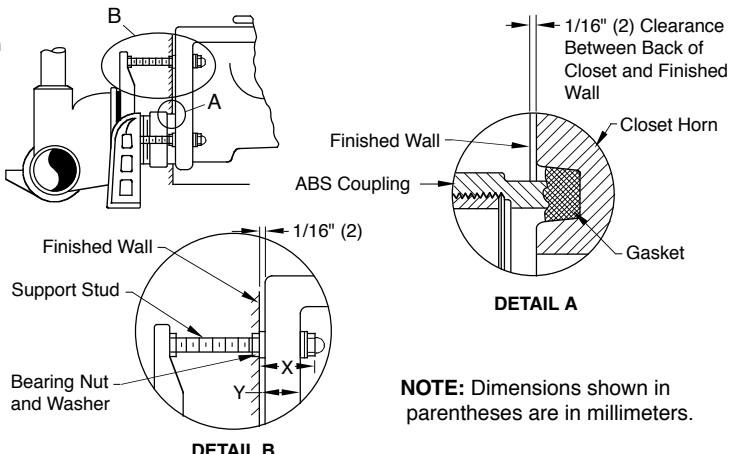
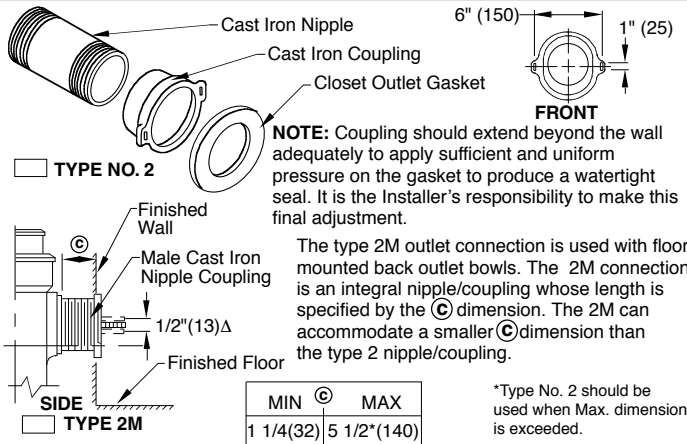
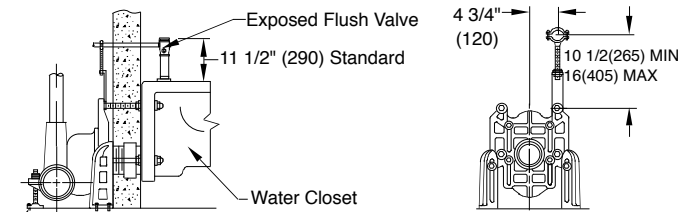
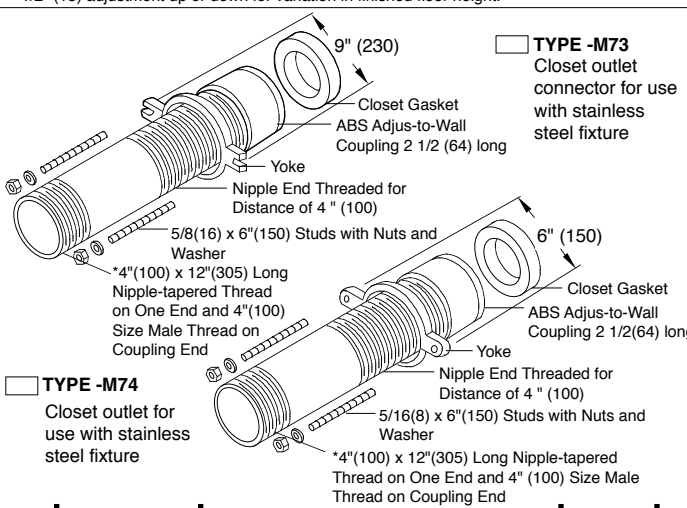
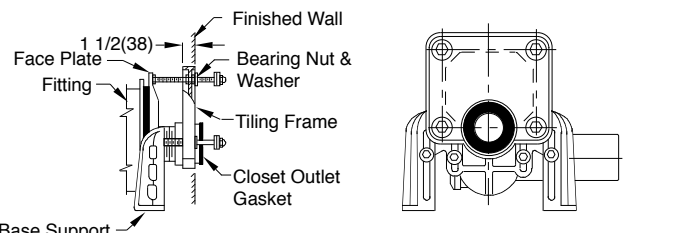


M	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com MEMBER OF: MEMBER OF:					LOCATION 																															
	ADJUSTABLE FIXTURE SUPPORTS FOR ELEVATED SIPHON JET WATER CLOSETS FOR WHEELCHAIR USERS DEEP ROUGH-IN TYPE																																				
	HORIZONTAL FITTINGS																																				
	SINGLE Fig. 0115RY Top View FRONT VIEW DOUBLE Fig. 0115DY Top View																																				
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA NOTE: Base support must be firmly anchored to floor with four 1/2"(13) bolts provided by contractor. NOTE: The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M-1995, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.																																					
Ⓒ DIMENSION - ADJUS-TO-WALL TYPE OUTLET CONNECTION The Smith Adjus-to-Wall outlet connection provides adjustment at the face of the wall at the time the fixture is set; thus, compensating for wall construction variations. The Ⓒ dimension is measured from the front of the face plate to the finished wall. To properly determine the length of nipple required, deduct 1" (25) from the Ⓒ dimension. When the dimension exceeds 7" (180), the -M40 Wide Pipe Chase Support is recommended. The Adjus-to-Wall coupling will provide 1/2" (13) horizontal adjustment in either direction with the coupling extended 5/16" (8) past face of the finished wall. Ⓒ dimension = 4" (100) (regularly furnished) consisting of nipple and Adjus-to-Wall coupling permitting adjustment from 3" (76) min. to 4" (100) max. ABS Nipple ABS Coupling																																					
NOTE: Dimensions shown in parentheses are in millimeters. *ABS (Regularly Furnished) other lengths PVC.																																					
Ⓒ DIMENSION - ADJUS-TO-WALL TYPE OUTLET CONNECTION The Smith Adjus-to-Wall outlet connection provides adjustment at the face of the wall at the time the fixture is set; thus, compensating for wall construction variations. The Ⓒ dimension is measured from the front of the face plate to the finished wall. To properly determine the length of nipple required, deduct 1" (25) from the Ⓒ dimension. When the dimension exceeds 7" (180), the -M40 Wide Pipe Chase Support is recommended. The Adjus-to-Wall coupling will provide 1/2" (13) horizontal adjustment in either direction with the coupling extended 5/16" (8) past face of the finished wall. Ⓒ dimension = 4" (100) (regularly furnished) consisting of nipple and Adjus-to-Wall coupling permitting adjustment from 3" (76) min. to 4" (100) max.																																					
NIPPLE LENGTHS AVAILABLE <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>LENGTH</th> <th>MIN.</th> <th>Ⓒ</th> <th>MAX.</th> </tr> </thead> <tbody> <tr> <td>2 1/2(64)</td> <td>2 1/4(57)</td> <td></td> <td>3 1/4(83)</td> </tr> <tr> <td>*3 1/4(83)</td> <td>3(76)</td> <td></td> <td>4(100)</td> </tr> <tr> <td>*8 1/4(210)</td> <td>8(205)</td> <td></td> <td>9(230)</td> </tr> <tr> <td>10(255)</td> <td>9 3/4(250)</td> <td></td> <td>10 3/4(275)</td> </tr> <tr> <td>12(305)</td> <td>11 3/4(300)</td> <td></td> <td>12 3/4(325)</td> </tr> <tr> <td>15(380)</td> <td>14 3/4(375)</td> <td></td> <td>15 3/4(400)</td> </tr> <tr> <td>18(455)</td> <td>17 3/4(450)</td> <td></td> <td>18 3/4(475)</td> </tr> </tbody> </table>						LENGTH	MIN.	Ⓒ	MAX.	2 1/2(64)	2 1/4(57)		3 1/4(83)	*3 1/4(83)	3(76)		4(100)	*8 1/4(210)	8(205)		9(230)	10(255)	9 3/4(250)		10 3/4(275)	12(305)	11 3/4(300)		12 3/4(325)	15(380)	14 3/4(375)		15 3/4(400)	18(455)	17 3/4(450)		18 3/4(475)
LENGTH	MIN.	Ⓒ	MAX.																																		
2 1/2(64)	2 1/4(57)		3 1/4(83)																																		
*3 1/4(83)	3(76)		4(100)																																		
*8 1/4(210)	8(205)		9(230)																																		
10(255)	9 3/4(250)		10 3/4(275)																																		
12(305)	11 3/4(300)		12 3/4(325)																																		
15(380)	14 3/4(375)		15 3/4(400)																																		
18(455)	17 3/4(450)		18 3/4(475)																																		
NOTE: When nipple lengths between 3 1/4" (83) and 8 1/4" (210) are specified, the 8 1/4" (210) nipple will be supplied. Nipple must be cut to specified length by others.																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%;">REV.</th> <th style="width: 15%;">DATE</th> <th style="width: 30%;">DESCRIPTION</th> <th style="width: 10%;">BY</th> <th style="width: 10%;">CKD. BY</th> <th style="width: 10%;">WEIGHT POUNDS</th> <th style="width: 10%;">VOLUME CUBIC FEET</th> <th style="width: 15%;">FIGURE NUMBER</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td style="text-align: center; font-size: 2em;">0115Y</td> </tr> </table>						REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER								0115Y																
REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER																														
							0115Y																														



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

D	   			LOCATION										
	MODIFICATIONS & VARIATIONS FOR SIPHON JET WATER CLOSETS													
	RECOMMENDED SETTING OF CLOSET OUTLET CONNECTION AND FIXTURE STUDS													
	Manufacturers have slight differences in the depth of the closet horn and flange thickness of their closets. Usually the fixture support closet connection should extend 5/16" (8) beyond face of finished wall (Dimension "R") and the fixture studs 2 1/4" (57) (Dimension "X"). For exact dimensions please use the formulas below. DETAIL A Formula for "R" is: $S + 1/16" (2) - D = R$. S = Depth of closet horn 1/16" (2) = Distance closet is to set away from finished wall. D = 1/2" (13) for felt gasket and 3/8" (10) for neoprene gasket. R = Distance coupling should extend beyond finished wall. NOTE: When the fixture is installed, closet gasket must be compressed sufficiently to assure a gas and water-tight seal. DETAIL B Formula for "X" is: $Y + 1/16" (2) + 9/16" (14) = X$. Y = Thickness of closet wall flange. 1/16" (2) = Distance closet is to set away from finished wall. X = Distance supporting stud should extend beyond finished wall. NOTE: Bearing nuts and washers must be set to take full loading from the fixture allowing 1/16" (2) clearance between fixture and wall.													
														
OPTIONAL CLOSET OUTLET CONNECTIONS														
 NOTE: Coupling should extend beyond the wall adequately to apply sufficient and uniform pressure on the gasket to produce a watertight seal. It is the Installer's responsibility to make this final adjustment. The type 2M outlet connection is used with floor mounted back outlet bowls. The 2M connection is an integral nipple/coupling whose length is specified by the © dimension. The 2M can accommodate a smaller © dimension than the type 2 nipple/coupling. <table border="1" style="margin: 10px auto; font-size: 0.7em;"> <thead> <tr> <th></th> <th>MIN</th> <th>©</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>TYPE NO. 2</td> <td>1 1/4 (32)</td> <td></td> <td>5 1/2" (140)</td> </tr> </tbody> </table> *Type No. 2 should be used when Max. dimension is exceeded.  Provides support and alignment for the supply pipe to an exposed flush valve; must be specified for either 1" (25) copper tube or 1" (25) iron pipe.						MIN	©	MAX	TYPE NO. 2	1 1/4 (32)		5 1/2" (140)		
	MIN	©	MAX											
TYPE NO. 2	1 1/4 (32)		5 1/2" (140)											
 TYPE -M73 Closet outlet connector for use with stainless steel fixture TYPE -M74 Closet outlet for use with stainless steel fixture  SUFFIX -M13 TILING FRAME - POLYSTYRENE														
 -M40 Recommended when © dimension exceeds 7" (180). Illustration shows single installation. For double (back to back) installations specify whether -M40 variation is required on one side or both sides of pipe chase. When ordering, the pipe chase width and © dimension should also be specified.														
100/400 Series Back Sheet														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">D C B</td> <td style="width: 15%;">2-27-12 12-10-03 2-26-96</td> <td style="width: 30%;">Rev. Note Type 2 outlet Added Note Added Millimeters</td> <td style="width: 15%;">TBW RN EMB</td> <td style="width: 15%;">AM CL BS</td> </tr> <tr> <td>REV.</td> <td>DATE</td> <td>DESCRIPTION</td> <td>BY</td> <td>CKD. BY</td> </tr> </table> WEIGHT POUNDS VOLUME CUBIC FEET FIGURE NUMBER 100/400 Series Back Sheet					D C B	2-27-12 12-10-03 2-26-96	Rev. Note Type 2 outlet Added Note Added Millimeters	TBW RN EMB	AM CL BS	REV.	DATE	DESCRIPTION	BY	CKD. BY
D C B	2-27-12 12-10-03 2-26-96	Rev. Note Type 2 outlet Added Note Added Millimeters	TBW RN EMB	AM CL BS										
REV.	DATE	DESCRIPTION	BY	CKD. BY										