

DRAWING NUMBER
S2108

A
SIZE

SCALE:
NONE

DATE: 12-16-88

APPROVED BY: **TDavis**

CHECKED BY:
CR

DRAWN BY:
WAS

2108


FIGURE
NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

FLOOR DRAIN

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

FREE AREA
9.25 SQ IN
(59.67 SQ CM)

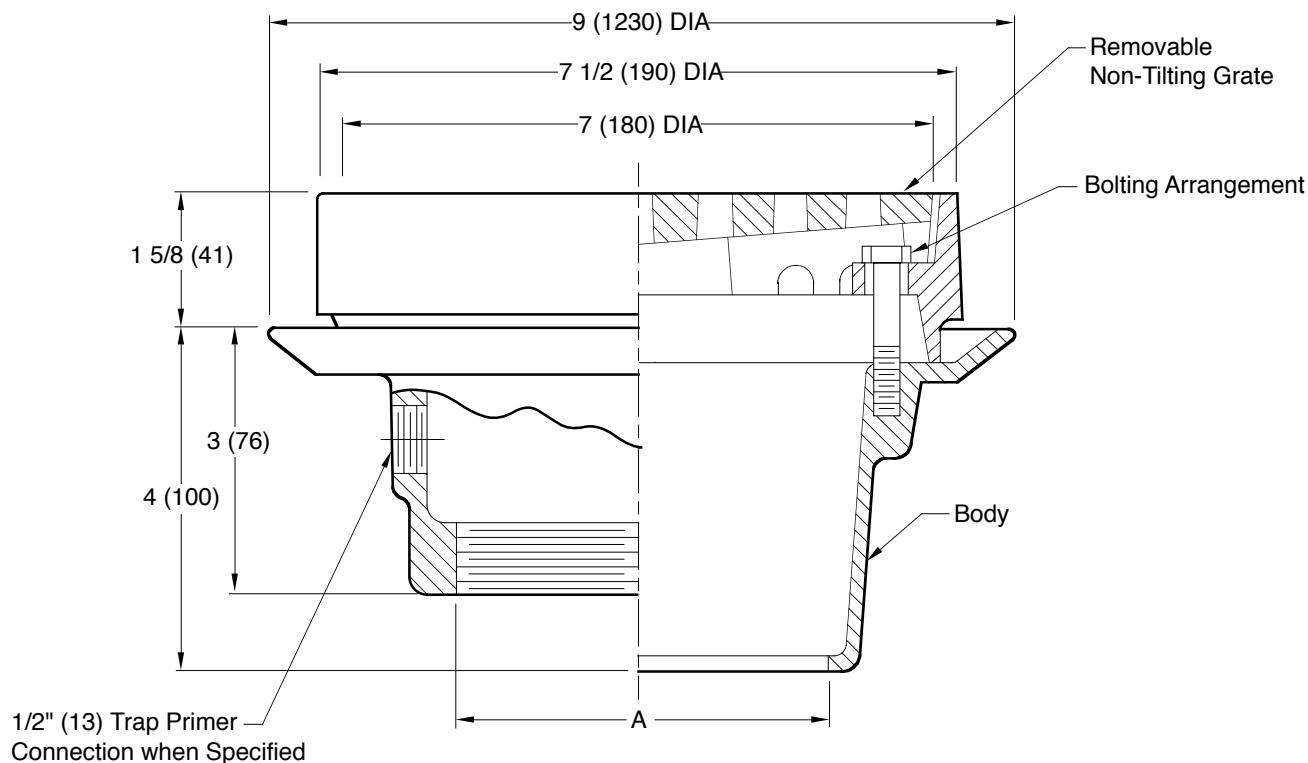

A(Pipe Size) = 02(50), 03(75), or 04(100)

	Fig. 2108C . . . CAULK OUTLET
	Fig. 2108Y . . . NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Body, Collar and
Non-Tilting Slotted ADA Grate.

VARIATIONS:

- | | |
|--------------------------|--|
| ☐ | Flat Bottom Strainer -FBS |
| ☐ | Trap Primer Connection
-P050 1/2(13), -P075 3/4(19) |
| ☐ | T Threaded Outlet |
| ☐ | Quad Close Trap Seal
(Specify Fig. 2692) |
| ☐ | L Speedi-Set® Service Weight Outlet |
| ☐ | LXH Speedi-Set® Extra Heavy Outlet |

OPTIONAL MATERIALS:

- | | |
|--------------------------|-------------------------|
| ☐ | All Galvanized -G |
| ☐ | Nickel Bronze Top -NB |
| ☐ | Polished Bronze Top -PB |

NOTE: Dimensions shown in parentheses are in millimeters.

K J H G	3-10-23 1-23-23 12-8-22 5-10-22	Added ® to "Speedi-Set" Added ADA Removed Seepage Openings Added Load Rating	KK KK KK KK	CL JT JT CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2108
REV.	DATE	DESCRIPTION	BY	CKD. BY			



 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov