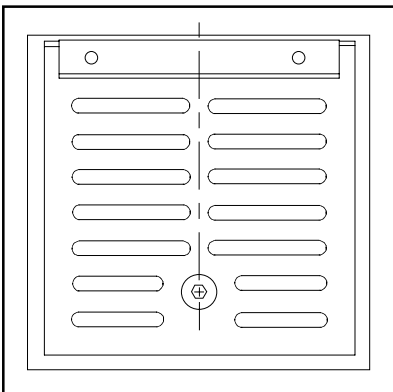
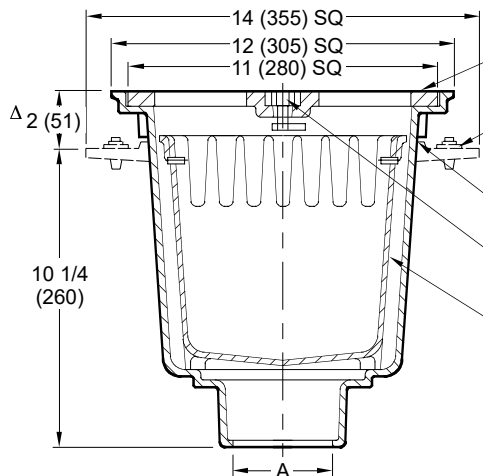


M	   				LOCATION	
	TRAFFIC FLOOR DRAINS					
	SQUARE TOP DRAINS WITH FREE STANDING SEDIMENT BUCKET Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.					
	Free Area 27 SQ IN (174) SQ CM 					
DRAWING NUMBER S2410	SIZE A	SCALE: NONE	DATE: 5-22-89	APPROVED BY: SB	CHECKED BY: McD	DRAWN BY: CMB
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA						
Δ 2 (51) 10 1/4 (260) A (Pipe Size) = 03(75), 04(100), 05(125) or 06(150)  Hinged Grate with Locking Device Flashing Clamp (When Specified) Seepage Openings (When -C Specified) Locking Device 8 1/4 (210) Deep Free Standing Sediment Bucket with Lift Bar						
Δ add 3/16" (5) when bronze top is specified. ☐ Fig. 2410C ... LESS FLANGE...CAULK OUTLET ☐ Fig. 2410Y ... LESS FLANGE...NO-HUB OUTLET ☐ Fig. 2415C ... WITH FLANGE...CAULK OUTLET ☐ Fig. 2415Y ... WITH FLANGE...NO-HUB OUTLET REGULARLY FURNISHED: Duco Cast Iron Body with Hinged ADA Grate, Locking Device and Sediment Bucket.						
VARIATIONS: ☐ Flashing Clamp -C (Fig. 2415 only) ☐ Loose Set Grate -LSG ☐ Vandal Proof Grate -U ☐ L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) Sizes only ☐ LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) Sizes only ☐ Quad Close Trap Seal (Specify Fig. 2692) ☐ Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19) OPTIONAL MATERIALS: ☐ Ductile Iron Grate -M ☐ Galvanized Cast Iron -G ☐ Nickel Bronze Top -NB ☐ Polished Bronze Top -PB NOTE: Dimensions shown in parentheses are in millimeters.						
FIGURE NUMBER	REV.	DATE	DESCRIPTION	BY	CKD. BY	FIGURE NUMBER
2410, 2415	M L K J	1-8-24 3-13-23 1-23-23 7-25-19	Revised Variations Added @ to "Speedi-Set" Added ADA Added Load Rating	HS TBW KK MW	CB CL JT JM	2410, 2415
WEIGHT POUNDS		VOLUME CUBIC FEET		FIGURE NUMBER		