
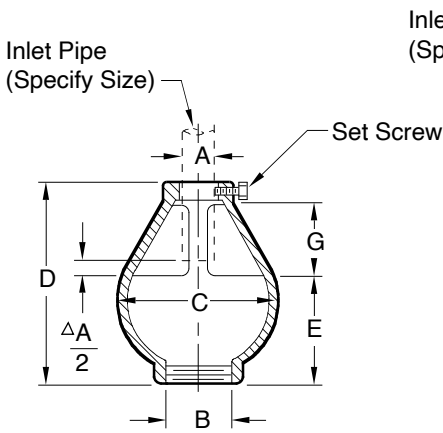
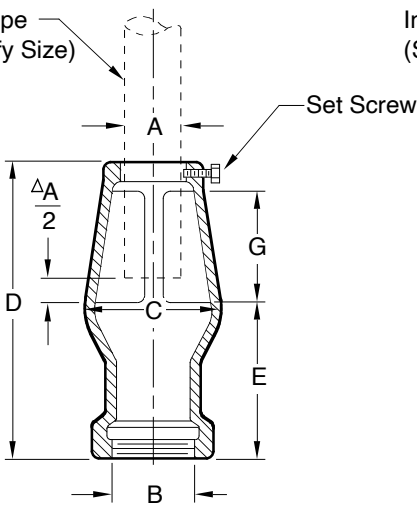


F	   					LOCATION																																																																																
	FIXED AIR GAPS																																																																																					
	  																																																																																					
	Fig. 3950T THREADED OUTLET ONLY (Specify A + B) Fig. 3951T THREADED OUTLET ONLY (Specify A + B) Fig. 3955 NO-HUB OUTLET (Y) SPIGOT OUTLET (S) (Specify A + B)																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse; font-size: 10px;"> <thead> <tr> <th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>G</th></tr> </thead> <tbody> <tr> <td>0250(10)</td><td>075(19)</td><td>3(76)</td><td>3(76)</td><td>1 3/4(44)</td><td>1(25)</td></tr> <tr> <td>050(15)</td><td>075(19)</td><td>4 1/4(110)</td><td>5 1/2(140)</td><td>3(76)</td><td>2(51)</td></tr> <tr> <td>050(15)</td><td>01(25)</td><td>4 1/4(110)</td><td>5 1/2(140)</td><td>3(76)</td><td>2(51)</td></tr> <tr> <td>075(20)</td><td>0150(38)</td><td>4 1/4(110)</td><td>5 1/2(140)</td><td>3(76)</td><td>2(51)</td></tr> <tr> <td>01(25)</td><td>0150(38)</td><td>4 1/4(110)</td><td>5 1/2(140)</td><td>3(76)</td><td>2(51)</td></tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 10px;"> <thead> <tr> <th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>G</th></tr> </thead> <tbody> <tr> <td>01(25)</td><td>02(51)</td><td>3 1/2(89)</td><td>8(205)</td><td>4 1/4(110)</td><td>3(76)</td></tr> <tr> <td>0125(35)</td><td>02(51)</td><td>3 1/2(89)</td><td>8(205)</td><td>4 1/4(110)</td><td>3(76)</td></tr> <tr> <td>0150(38)</td><td>02(51)</td><td>3 1/2(89)</td><td>8(205)</td><td>4 1/4(110)</td><td>3(76)</td></tr> <tr> <td>02(50)</td><td>03(75)</td><td>4 1/2(115)</td><td>11 1/2(290)</td><td>6 1/2(165)</td><td>4(100)</td></tr> <tr> <td>03(75)</td><td>04(100)</td><td>6 1/2(165)</td><td>15 1/2(395)</td><td>8 (205)</td><td>6(150)</td></tr> <tr> <td>04(100)</td><td>06(150)</td><td>8 1/2(215)</td><td>20(510)</td><td>10(255)</td><td>8(205)</td></tr> </tbody> </table> NO-HUB Outlet (Y) available in 02"(50) and 03"(75) only.							A	B	C	D	E	G	0250(10)	075(19)	3(76)	3(76)	1 3/4(44)	1(25)	050(15)	075(19)	4 1/4(110)	5 1/2(140)	3(76)	2(51)	050(15)	01(25)	4 1/4(110)	5 1/2(140)	3(76)	2(51)	075(20)	0150(38)	4 1/4(110)	5 1/2(140)	3(76)	2(51)	01(25)	0150(38)	4 1/4(110)	5 1/2(140)	3(76)	2(51)	A	B	C	D	E	G	01(25)	02(51)	3 1/2(89)	8(205)	4 1/4(110)	3(76)	0125(35)	02(51)	3 1/2(89)	8(205)	4 1/4(110)	3(76)	0150(38)	02(51)	3 1/2(89)	8(205)	4 1/4(110)	3(76)	02(50)	03(75)	4 1/2(115)	11 1/2(290)	6 1/2(165)	4(100)	03(75)	04(100)	6 1/2(165)	15 1/2(395)	8 (205)	6(150)	04(100)	06(150)	8 1/2(215)	20(510)	10(255)	8(205)	REGULARLY FURNISHED: Duco Cast Iron OPTIONAL MATERIALS: Cast Bronze -CB Chrome Plated Bronze -CP Chrome Plated Cast Iron -CPCI	
A	B	C	D	E	G																																																																																	
0250(10)	075(19)	3(76)	3(76)	1 3/4(44)	1(25)																																																																																	
050(15)	075(19)	4 1/4(110)	5 1/2(140)	3(76)	2(51)																																																																																	
050(15)	01(25)	4 1/4(110)	5 1/2(140)	3(76)	2(51)																																																																																	
075(20)	0150(38)	4 1/4(110)	5 1/2(140)	3(76)	2(51)																																																																																	
01(25)	0150(38)	4 1/4(110)	5 1/2(140)	3(76)	2(51)																																																																																	
A	B	C	D	E	G																																																																																	
01(25)	02(51)	3 1/2(89)	8(205)	4 1/4(110)	3(76)																																																																																	
0125(35)	02(51)	3 1/2(89)	8(205)	4 1/4(110)	3(76)																																																																																	
0150(38)	02(51)	3 1/2(89)	8(205)	4 1/4(110)	3(76)																																																																																	
02(50)	03(75)	4 1/2(115)	11 1/2(290)	6 1/2(165)	4(100)																																																																																	
03(75)	04(100)	6 1/2(165)	15 1/2(395)	8 (205)	6(150)																																																																																	
04(100)	06(150)	8 1/2(215)	20(510)	10(255)	8(205)																																																																																	
NOTE: Dimensions shown in parentheses are in millimeters.							$\frac{\Delta A}{2} = 1/2(13)$ Dia. of Inlet Pipe MIN - The lowest point of the indirect waste pipe to the flood level rim of the receptor shall be a minimum of one inch (1").																																																																															
3950,3951,3955							FIGURE NUMBER 3950,3951,3955																																																																															
F	7-26-23	Removed Function Revised Note, Added Note Rev. Callouts, Added Note Revised Table	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3950,3951,3955																																																																															
E	9-11-18		TBW	TBW																																																																																		
D	6-23-14		TBW	SJM																																																																																		
C	3-24-14		TBW	CL																																																																																		
REV.	DATE	DESCRIPTION	BY	CKD. BY																																																																																		

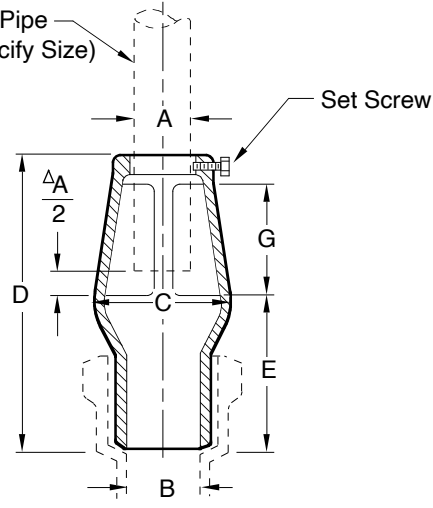

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov