

R	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com MEMBER OF: MEMBER OF: MEMBER OF:				LOCATION 			
	FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS							
DRAWING NUMBER S4020	SIZE A	SCALE: NONE	DATE: 2-16-70	APPROVED BY: JM	CHECKED BY: BH	DRAWN BY: RK	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE	
ROUND NICKEL BRONZE TOP								
NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16\"(160)."								
"A" (Pipe Size) = 02(50), 03(75), 04(100) or 05(125) Conforms to ASME A112.36.2/CSA B79.2								
☐ Fig. 4020S.....Gasket Seal - ABS Plug ☐ Fig. 4021S.....Gasket Seal - Bronze Plug ☐ Fig. 4023S.....Taper Thread - Bronze Plug ☐ Fig. 4024S.....Taper Thread - ABS Plug (Twis-to-Floor® design shown with gasketed plug.)								
REGULARLY FURNISHED: Duco Cast Iron Cleanout with Round Adjustable Scoriated Secured Nickel Bronze Top. Closure Plug Type as Indicated By Figure Number Selected. VARIATIONS: ☐ Flashing Flange -F ☐ Flange with Flashing Clamp -F-C ☐ Carpet Clamping Type -X ☐ Carpet Marker Type -Y ☐ Vandal Proof Top -U ☐ Wide Flange (DX) OPTIONAL MATERIALS: ☐ Galvanized Cast Iron -G ☐ Polished Bronze Top -PB ☐ Stainless Steel Top -NBSS								
NOTE: Dimensions shown in parentheses are in millimeters.								
FIGURE NUMBER 4020 SERIES	R Q P N	4-11-24 8-11-23 8-20-20 11-20-09	Added ASME Note Removed Function Addition to Opt. Materials Revised Variations	HS HS MW RN	CL CL CL BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4020 SERIES
REV.	DATE	DESCRIPTION		BY	CKD. BY			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP

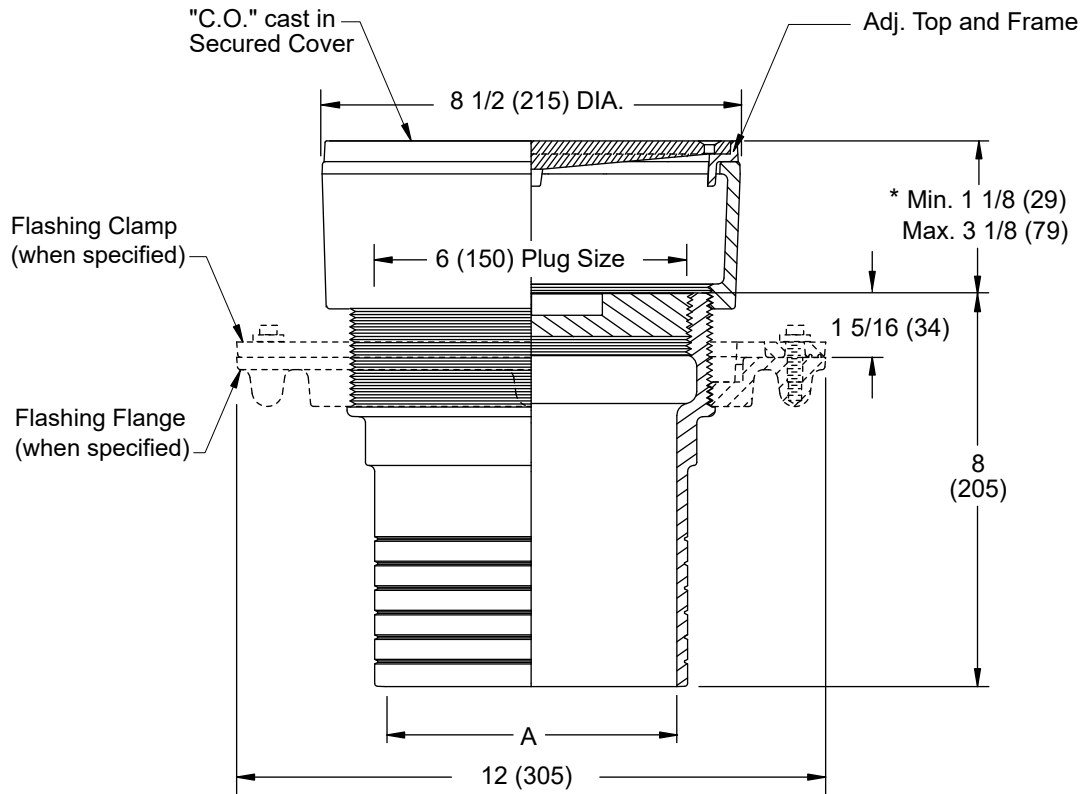

SPIGOT OUTLET▲
 "A" (Pipe Size) = 06(150) & 08(200)

Conforms to ASME A112.36.2/CSA B79.2

▲ Sized for Service Weight and/or NO-HUB.
 * When Flange-F is specified Min. 1 1/8 (29) becomes 1 5/8 (41)

"TWIS-TO-FLOOR®" ADJUSTMENT
SPIGOT OUTLET▲

☐ Fig. 4023S.....Taper Thread - Bronze Plug

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Secured Nickel Bronze Top.

VARIATIONS:

- ☐ Flashing Flange -F
- ☐ Flange with Flashing Clamp -F-C
- ☐ Carpet Clamping Type -X
- ☐ Carpet Marker Type -Y
- ☐ Vandal Proof Top -U
- ☐ Wide Flange (DX)

OPTIONAL MATERIALS:

- ☐ Galvanized Cast Iron -G
- ☐ Polished Bronze Top -PB
- ☐ Stainless Steel Top -NBSS

NOTE: Dimensions shown in parentheses are in millimeters.

4023

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY
C	4-11-24	Added ASME Note	HS	CL
B	8-24-23	Removed Function	HS	CL
A	3-10-23	Revised Optional Materials	KK	CL

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER
4023



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov