

L	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com MEMBER OF: MEMBER OF:				LOCATION																											
	FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS																															
DRAWING NUMBER S4040	SIZE A	SCALE: NONE	DATE: 2-16-70	APPROVED BY: JM	CHECKED BY: BH	DRAWN BY: RK	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE		WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA																							
SQUARE NICKEL BRONZE TOP																																
"A" (Pipe Size) = 02(50), 03(75), 04(100) or 05(125)																																
<table border="0"> <tr> <td>☐</td> <td>Fig. 4040S.....Gasket Seal - ABS Plug</td> </tr> <tr> <td>☐</td> <td>Fig. 4041S.....Gasket Seal - Bronze Plug</td> </tr> <tr> <td>☐</td> <td>Fig. 4043S.....Taper Thread - Bronze Plug</td> </tr> <tr> <td>☐</td> <td>Fig. 4044S.....Taper Thread - ABS Plug</td> </tr> </table> (Twis-to-Floor® design shown with gasketed plug.)											☐	Fig. 4040S.....Gasket Seal - ABS Plug	☐	Fig. 4041S.....Gasket Seal - Bronze Plug	☐	Fig. 4043S.....Taper Thread - Bronze Plug	☐	Fig. 4044S.....Taper Thread - ABS Plug														
☐	Fig. 4040S.....Gasket Seal - ABS Plug																															
☐	Fig. 4041S.....Gasket Seal - Bronze Plug																															
☐	Fig. 4043S.....Taper Thread - Bronze Plug																															
☐	Fig. 4044S.....Taper Thread - ABS Plug																															
REGULARLY FURNISHED: Duco Cast Iron Cleanout with Square Adjustable Scoriated Secured Nickel Bronze Top. Closure Plug Type as Indicated By Figure Number Selected. VARIATIONS: <table border="0"> <tr> <td>☐</td> <td>Flashing Flange -F</td> </tr> <tr> <td>☐</td> <td>Flange with Flashing Clamp -F-C</td> </tr> <tr> <td>☐</td> <td>Vandal Proof Top -U</td> </tr> </table> OPTIONAL MATERIALS: <table border="0"> <tr> <td>☐</td> <td>Galvanized Cast Iron -G</td> </tr> <tr> <td>☐</td> <td>Polished Bronze Top -PB</td> </tr> </table>											☐	Flashing Flange -F	☐	Flange with Flashing Clamp -F-C	☐	Vandal Proof Top -U	☐	Galvanized Cast Iron -G	☐	Polished Bronze Top -PB												
☐	Flashing Flange -F																															
☐	Flange with Flashing Clamp -F-C																															
☐	Vandal Proof Top -U																															
☐	Galvanized Cast Iron -G																															
☐	Polished Bronze Top -PB																															
NOTE: Dimensions shown in parentheses are in millimeters.																																
FIGURE NUMBER 4040 SERIES	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">L</td> <td style="width: 10%;">08-11-23</td> <td style="width: 30%;">Removed Function</td> <td style="width: 10%;">HS</td> <td style="width: 10%;">CL</td> <td rowspan="4" style="width: 10%;">WEIGHT POUNDS</td> <td rowspan="4" style="width: 10%;">VOLUME CUBIC FEET</td> <td rowspan="4" style="width: 20%;">FIGURE NUMBER 4040 SERIES</td> </tr> <tr> <td>K</td> <td>07/26/02</td> <td>Corrected Clamp & Flange view</td> <td>JJ</td> <td>CL</td> </tr> <tr> <td>J</td> <td>05/03/01</td> <td>Edited Outlet Text</td> <td>JJ</td> <td>CL</td> </tr> <tr> <td>H</td> <td>10/17/00</td> <td>New design</td> <td>JJ</td> <td>BS</td> </tr> <tr> <td>REV.</td> <td>DATE</td> <td>DESCRIPTION</td> <td>BY</td> <td>CKD. BY</td> <td></td> <td></td> <td></td> </tr> </table>	L	08-11-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4040 SERIES	K	07/26/02	Corrected Clamp & Flange view	JJ	CL	J	05/03/01	Edited Outlet Text	JJ	CL	H	10/17/00	New design	JJ	BS	REV.	DATE	DESCRIPTION	BY	CKD. BY			
L	08-11-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET				FIGURE NUMBER 4040 SERIES																						
K	07/26/02	Corrected Clamp & Flange view	JJ	CL																												
J	05/03/01	Edited Outlet Text	JJ	CL																												
H	10/17/00	New design	JJ	BS																												
REV.	DATE	DESCRIPTION	BY	CKD. BY																												



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

SQUARE NICKEL BRONZE TOP

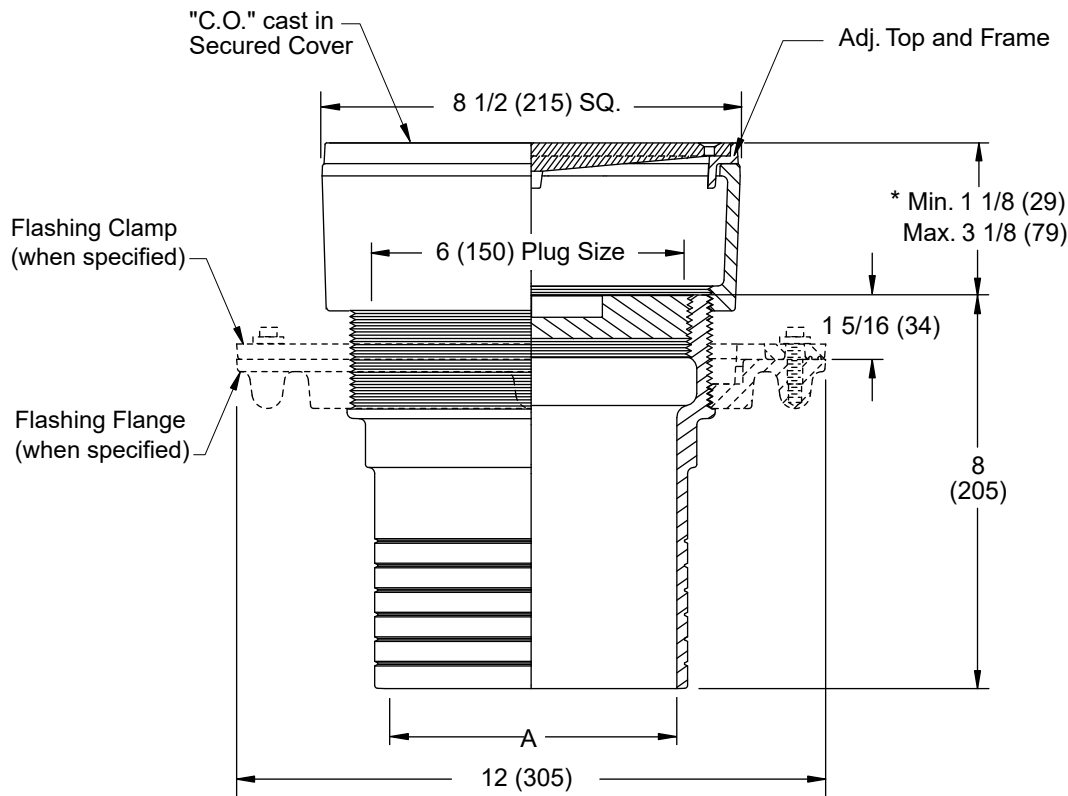

SPIGOT OUTLET▲
 "A" (Pipe Size) = 06(150) & 08(200)

▲ Sized for Service Weight and/or NO-HUB.
 * When Flange-F is specified Min. 1 1/8 (29) becomes 1 5/8 (41)

"TWIS-TO-FLOOR®" ADJUSTMENT
SPIGOT OUTLET▲

☐ Fig. 4043S.....Taper Thread - Bronze Plug

REGULARLY FURNISHED:
 Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Square Adjustable Scoriated Secured Nickel Bronze Top.

VARIATIONS:
☐ Flashing Flange -F
☐ Flange with Flashing Clamp -F-C
☐ Vandal Proof Top -U

OPTIONAL MATERIALS:
☐ Galvanized Cast Iron -G
☐ Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

4043

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY
A	8-11-23	Removed Function	HS	CL

WEIGHT POUNDS	VOLUME CUBIC FEET
---------------	-------------------

FIGURE NUMBER
4043