

V	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com MEMBER OF: PLUMBING AND DRAINAGE INSTITUTE					LOCATION 																																																									
	HYDROTROLS ENGINEERED WATER HAMMER ARRESTERS																																																														
DRAWING NUMBER S5005	SIZE A	SCALE: NONE	DATE: 2-12-86	APPROVED BY: TD	CHECKED BY: KG	DRAWN BY: CM	Hydrotrols are pre-charged with nitrogen and permanently sealed at the factory. All hydrotrols are constructed entirely of stainless steel. <table border="1" style="margin: 10px auto; width: 80%; font-size: 8px;"> <thead> <tr> <th>PCN/ Fig. No.</th> <th>P.D.I. Symbol</th> <th>Fixture Unit Rating</th> <th>A SIZE</th> <th>B</th> <th>C</th> <th>D</th> <th>E</th> </tr> </thead> <tbody> <tr> <td>5005</td> <td>A</td> <td>1-11</td> <td>3/4 (19)</td> <td>3.25 (83)</td> <td>3.25 (83)</td> <td>1.60 (41)</td> <td>1.57 (40)</td> </tr> <tr> <td>5010</td> <td>B</td> <td>12-32</td> <td>1 (25)</td> <td>4.06 (103)</td> <td>3.25 (83)</td> <td>2.05 (52)</td> <td>2.00 (50)</td> </tr> <tr> <td>5020</td> <td>C</td> <td>33-60</td> <td>1 (25)</td> <td>4.38 (111)</td> <td>3.25 (83)</td> <td>2.36 (60)</td> <td>2.00 (50)</td> </tr> <tr> <td>5030</td> <td>D</td> <td>61-113</td> <td>1 (25)</td> <td>5.25 (133)</td> <td>3.25 (83)</td> <td>3.26 (83)</td> <td>2.00 (50)</td> </tr> <tr> <td>5040</td> <td>E</td> <td>114-154</td> <td>1 (25)</td> <td>7.03 (179)</td> <td>3.25 (83)</td> <td>5.04 (128)</td> <td>2.00 (50)</td> </tr> <tr> <td>5050</td> <td>F</td> <td>155-330</td> <td>1 (25)</td> <td>7.03 (179)</td> <td>3.25 (83)</td> <td>5.04 (128)</td> <td>2.00 (50)</td> </tr> </tbody> </table> RECOMMENDED SPECIFICATION FOR HYDROSTATIC SHOCK CONTROL Smith series 5000 "Hydrotrol" all stainless steel shock absorbers shall be installed at all solenoid, remote operated or quick closing valves and at each plumbing fixture or battery of plumbing fixtures. Install on both hot and cold water branch lines in an upright position as close as possible to the valve or valves being served. Sizes and locations as indicated on drawings. NOTE: Sizing information on reverse side. NOTE: Stainless steel units are lead-free.	PCN/ Fig. No.	P.D.I. Symbol	Fixture Unit Rating	A SIZE	B	C	D	E	5005	A	1-11	3/4 (19)	3.25 (83)	3.25 (83)	1.60 (41)	1.57 (40)	5010	B	12-32	1 (25)	4.06 (103)	3.25 (83)	2.05 (52)	2.00 (50)	5020	C	33-60	1 (25)	4.38 (111)	3.25 (83)	2.36 (60)	2.00 (50)	5030	D	61-113	1 (25)	5.25 (133)	3.25 (83)	3.26 (83)	2.00 (50)	5040	E	114-154	1 (25)	7.03 (179)	3.25 (83)	5.04 (128)	2.00 (50)	5050	F	155-330	1 (25)	7.03 (179)	3.25 (83)	5.04 (128)	2.00 (50)
PCN/ Fig. No.	P.D.I. Symbol	Fixture Unit Rating	A SIZE	B	C	D		E																																																							
5005	A	1-11	3/4 (19)	3.25 (83)	3.25 (83)	1.60 (41)	1.57 (40)																																																								
5010	B	12-32	1 (25)	4.06 (103)	3.25 (83)	2.05 (52)	2.00 (50)																																																								
5020	C	33-60	1 (25)	4.38 (111)	3.25 (83)	2.36 (60)	2.00 (50)																																																								
5030	D	61-113	1 (25)	5.25 (133)	3.25 (83)	3.26 (83)	2.00 (50)																																																								
5040	E	114-154	1 (25)	7.03 (179)	3.25 (83)	5.04 (128)	2.00 (50)																																																								
5050	F	155-330	1 (25)	7.03 (179)	3.25 (83)	5.04 (128)	2.00 (50)																																																								
 PLUMBING AND DRAINAGE INSTITUTE Hydrotrols Fig. 5005 to 5050 inclusive have been tested and certified in accordance with the Plumbing and Drainage Institute "Standard P.D.I. WH-201" Refer to www.pdionline.org Listed: STD 1010 NOTE: Dimensions shown in parentheses are in millimeters.																																																															
FIGURE NUMBER 5005 To 5050	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE	<table border="1" style="width: 100%; font-size: 8px;"> <tr> <td style="width: 10%;">REV.</td> <td style="width: 15%;">DATE</td> <td style="width: 30%;">DESCRIPTION</td> <td style="width: 10%;">BY</td> <td style="width: 10%;">CKD. BY</td> <td style="width: 15%;">WEIGHT POUNDS</td> <td style="width: 15%;">VOLUME CUBIC FEET</td> <td style="width: 15%;">FIGURE NUMBER</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center; font-size: 24px;">5005 To 5050</td> </tr> </table>					REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER								5005 To 5050																																									
REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER																																																								
							5005 To 5050																																																								

HYDROTROLS

SIMPLIFIED SIZING METHOD

The selection and specification for the correct size Hydrotrol for each piping run may be easily accomplished by the following procedure which incorporates length of piping run, water pressure and other pertinent data into the Sizing Chart.

The Hydrotrol Sizing Chart shows the number of fixture units that may be accommodated by each size Hydrotrol. The U.S. Bureau of Standards "Fixture Unit Rating Table" designates the fixture unit rating for each plumbing fixture when installed in public or private buildings. Referring to the "Fixture Unit Rating Table", determine the fixture unit rating of each plumbing fixture on the line. Add the total number of fixture units on the line, and use this figure to select and specify the size Hydrotrol required as indicated on the Hydrotrol Sizing Chart.

EXAMPLE:


The drawing shows plumbing fixtures installed on a typical piping layout. The figures to the right of each fixture run are the total fixture units for the run based on the fixture unit rating table. The total number of fixture units for each plumbing fixture on the line has been added and is shown for both hot and cold water lines. The total number of fixture units for each run determines the size of Hydrotrol required. If the fixture unit total ends up in a 1/2 number, round up to the next larger whole number.

The additional Hydrotrols shown on batteries of over 20'(6.096M) in length are the same size as those specified in the chart ... shown for each floor.

The following general rules are applicable to proper placement of "Hydrotrols". The locations shown in the installation layout are recommended to give the maximum in water hammer arresting effectiveness:

1. Single fixtures or appliances --Locate Hydrotrol just before fixture or valve.
2. Battery of fixtures -- Length of battery 20'(6.096M) or less. Locate Hydrotrol between the last and next to last fixtures. (See 5th Floor Examples.)
3. For a battery of fixtures having a branch line over 20 (6.096M) ft. in length, two Hydrotrols should be installed. The two Hydrotrols selected should have combined fixture unit rating equal to or greater than the total fixture unit demand of the plumbing fixtures on the entire branch line. Locate one Hydrotrol between the last and next-to-the-last fixture on the branch line. The other Hydrotrol to be located at a point equal to half the length of the branch line. (See first floor example).
4. On hot water branch lines over 20 (6.096M) ft. in length, where plumbing fixtures are installed on a portion of the line, the second Hydrotrol should be located at a point half the distance of the plumbing fixtures installed. (See second and third floor examples).
5. For special or unique battery arrangements or piping layouts, please consult the Smith Engineering Dept. for the proper specification on sizing and placement.

FOR APPLICATIONS NOT COVERED BY THE FIXTURE UNIT RATING TABLE -

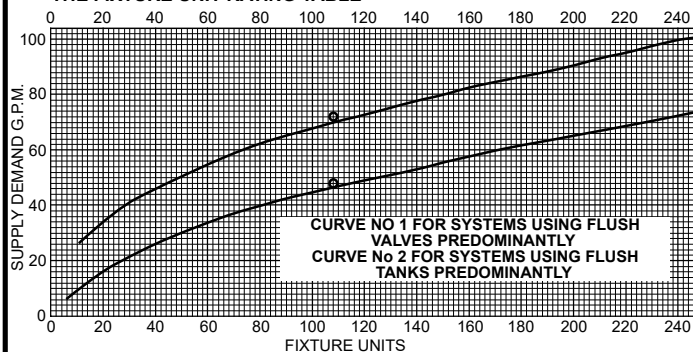

The Graph Chart is based on the U.S. Bureau of Standards Sizing Table and may be used to determine the fixture unit rating based on GPM supplied to the fixture in question.


HYDROTROL SIZING CHART

P.D.I. SYMBOLS	A	B	C	D	E	F
HYDROTROL	5005	5010	5020	5030	5040	5050
Fixture Unit	1-11	12-32	33-60	61-113	114-154	155-330
Rating						

NOTE: Systems exceeding 60 PSI(414 kPa) shall be installed with a pressure reducing valve upstream of the unit per ASSE Standard #1010.

FIXTURE UNIT RATING TABLE GENERAL BUILDING AREAS

FIXTURE	TYPE OF SUPPLY CONTROL	WEIGHT IN FIXTURE - UNITS			
		PUBLIC		PRIVATE	
		C.W.	H.W.	C.W.	H.W.
Water Closet	Flush Valve - 1.6 GPF	8	-	5	-
Water Closet	Flush Tank - 1.6 GPF	5	-	3	-
Pedestal Urinal	Flush Valve - 1.06 GPF	4	-	-	-
Stall or Wall Urinal	Flush Valve - 1.06 GPF	4	-	-	-
Stall or Wall Urinal	Flush Tank	2	-	-	-
Lavatory	Faucet	1 1/2	1 1/2	1	1
Bathub	Faucet	2	3	1 1/2	1 1/2
Shower head	Mixing Valve	2	3	1	2
Bathroom Group	Flush Valve Closet	-	-	8	3
Bathroom Group	Flush Tank Closet	-	-	6	3
Separate Shower	Mixing Valve	-	-	1	2
Service Sink	Faucet	3	3	-	-
Laundry Tubs (1-3)	Faucet	-	-	3	3
Combination Fixture	Faucet	-	-	3	3

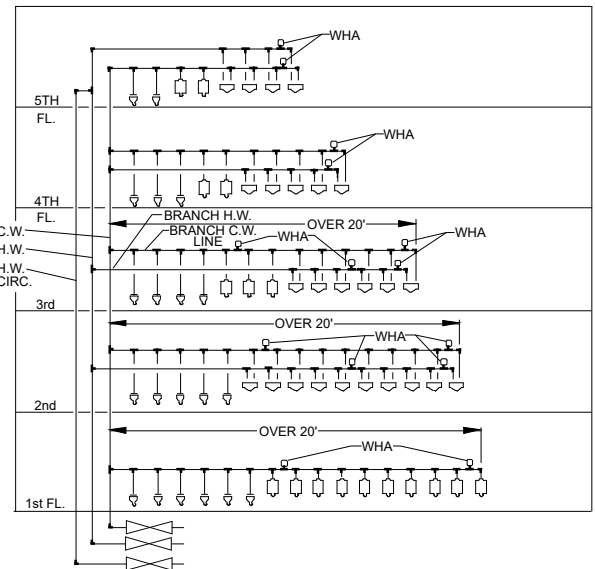

ALTERNATE SIZING METHOD

The simplified sizing method covers 90% of most applications encountered. Where fixture unit ratings are not available or where water is piped to remote items of equipment, the following method of Hydrotrol selection should be used:

- INFORMATION REQUIRED TO USE CHART:**
1. LENGTH OF PIPE RUN. Length of pipe run should be determined from the point of valve closure to a point of relief, such as a large pipe riser twice the size of the branch line, main line or water tank.
 2. PIPE SIZE.
 3. WATER PRESSURE.

HYDROTROL SELECTION CHART

LENGTH OF PIPE	NOMINAL PIPE SIZE					
	1/2"(13)	3/4"(19)	1"(25)	1 1/4"(32)	1 1/2"(38)	2"(51)
25	5005	5005	5010	5020	5030	5040
50	5005	5010	5020	5030	5040	5050
75	5010	5020	5030	1-5005 1-5040	5050	1-5040 1-5050
100	5020	5030	5040	5050	1-5020 1-5050	2-5050
125	5020	5030	5050	1-5005 1-5050	1-5040 1-5050	1-5040 2-5050
150	5030	5040	5050	1-5030 1-5050	2-5050	3-5050

REV.	DATE	DESCRIPTION	BY	CKD. BY
E D C	8-5-22 3-2-15 01/20/11	Rev. Note Rev. Note, Tables, Example Updated Logo	KK TBW JJ	CL TK TW

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		5005BS



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov