

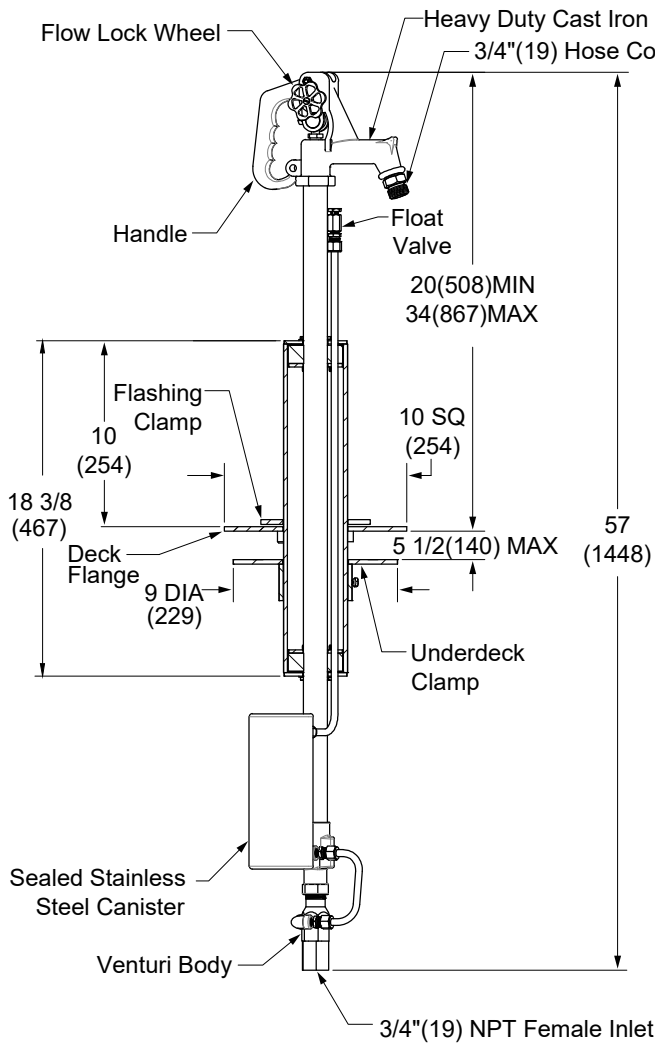
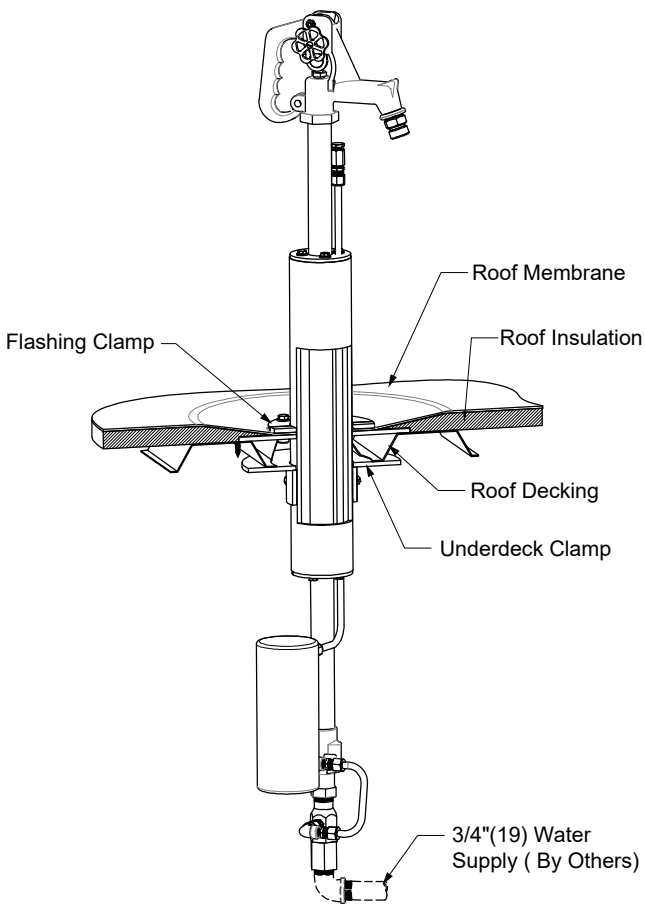


H	DRAWING NUMBER s5903	SIZE A	SCALE: NONE	DATE: 5-17-12	APPROVED BY: CR	CHECKED BY: CL	DRAWN BY: CL	5903	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com					   MEMBER OF:					LOCATION											
									NON-FREEZE SANITARY ROOF HYDRANT																					
																														
																														
									Installation Illustration (For Illustration Purpose Only)																					
REGULARLY FURNISHED: Non-Freeze Sanitary (Self Contained) Roof Hydrant with Galvanized Casing, Adjustable Flow Wheel Lock Handle, Sealed Stainless Steel Canister, Venturi and Roof Mount Assembly.																														
VARIATIONS: ☐ Vacuum Breaker -H																														
NOTES: 1. Hose must be removed to allow proper draining of the casing. Smith is not responsible for any casings that burst or related incidents if the hose is not removed. 2. The AB100, AB1953 California Lead Law and NSF/ANSI Standard 61 - Drinking Water system Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking. 3. Upon activating, hydrant should be discharged fully open a minimum of 30 seconds. 4. Minimum operating line pressure should be 25 psi for proper operation. 5. Dimensions shown in parentheses are in millimeters. 6. FOR IRRIGATION PURPOSES ONLY. 7. Temperature Range: 33.0°F to 140.0°F (0.6°C to 60.0°C).																														
<table><tr><td>H G F E</td><td>2-4-25 10-22-24 8-4-23 3-22-23</td><td>Revised Notes Revised Notes Removed Function Revised Note 2</td><td>HS HS HS KK</td><td>BW CL CL JT</td><td>WEIGHT POUNDS</td><td>VOLUME CUBIC FEET</td><td>FIGURE NUMBER 5903</td></tr><tr><td>REV.</td><td>DATE</td><td>DESCRIPTION</td><td>BY</td><td>CKD. BY</td><td></td><td></td><td></td></tr></table>															H G F E	2-4-25 10-22-24 8-4-23 3-22-23	Revised Notes Revised Notes Removed Function Revised Note 2	HS HS HS KK	BW CL CL JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 5903	REV.	DATE	DESCRIPTION	BY	CKD. BY			
H G F E	2-4-25 10-22-24 8-4-23 3-22-23	Revised Notes Revised Notes Removed Function Revised Note 2	HS HS HS KK	BW CL CL JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 5903																							
REV.	DATE	DESCRIPTION	BY	CKD. BY																										
 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov																														


NON-FREEZE SANITARY ROOF HYDRANT

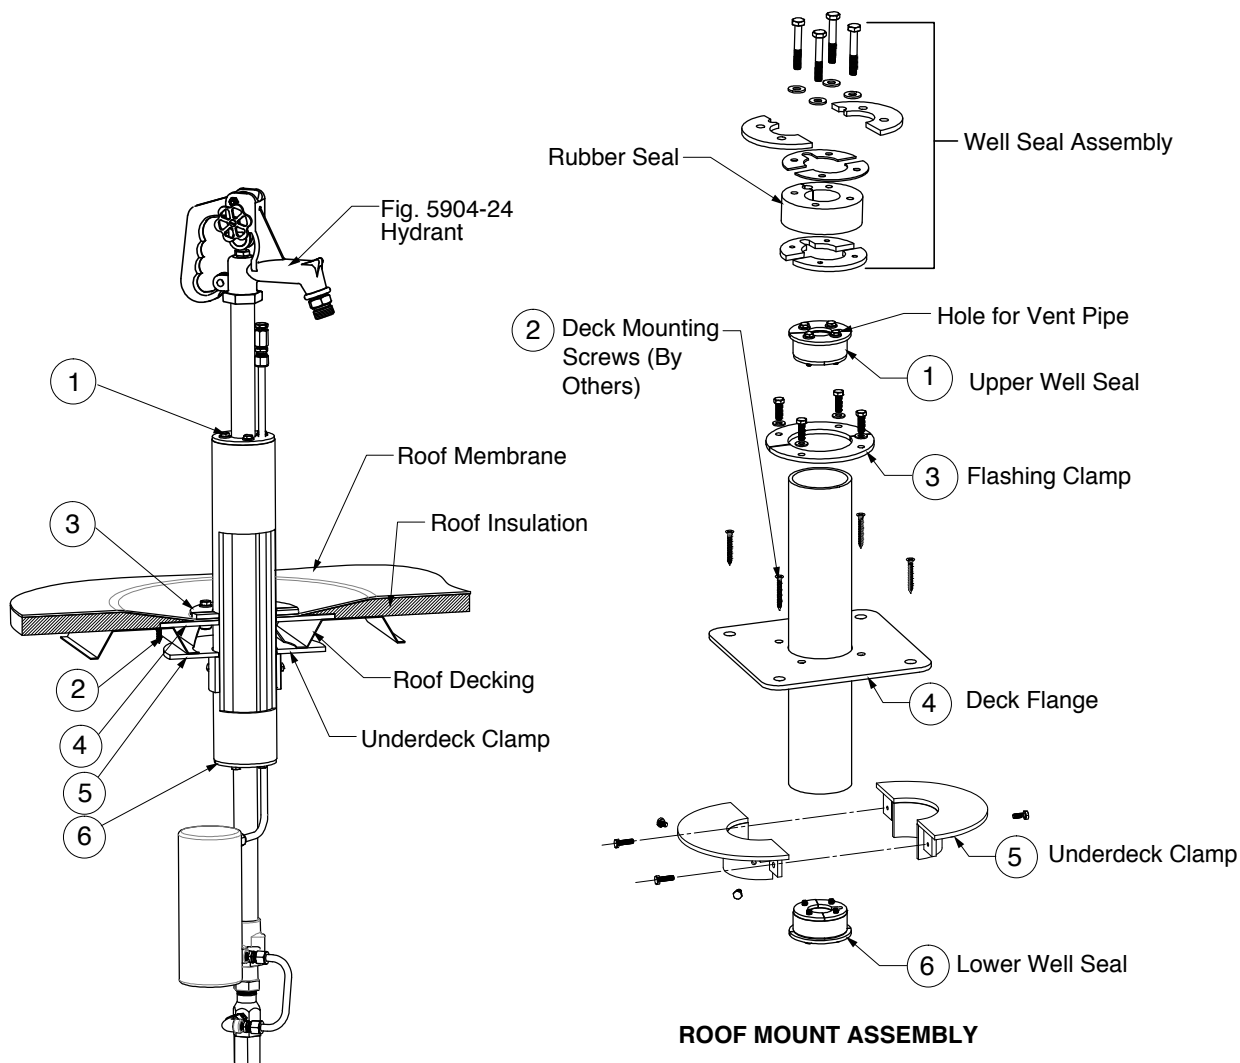

Installation Illustration (For Illustration Purpose Only)

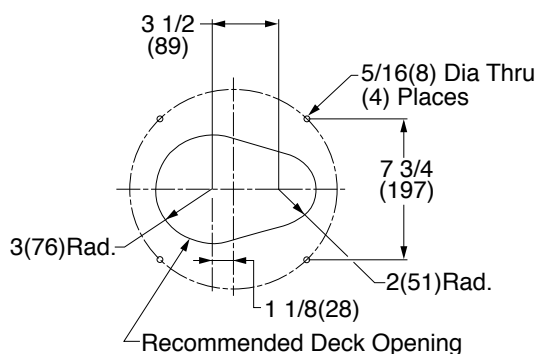

ROOF MOUNT ASSEMBLY

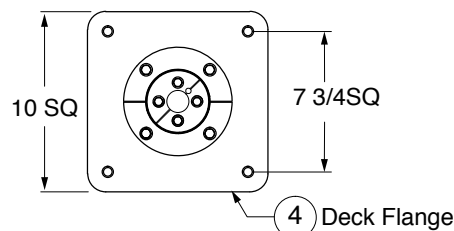

NOTE: Fig.5903 hydrant is comprised of a 5904-24 hydrant and roof mount assembly. For hydrant part information reference the 5904 submittal.

B A	4-30-13 9-20-12	Revised Underdeck Clamp Added Rec. Deck Opening	TBW TBW	CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 5903BS
REV.	DATE	DESCRIPTION	BY	CKD. BY			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov