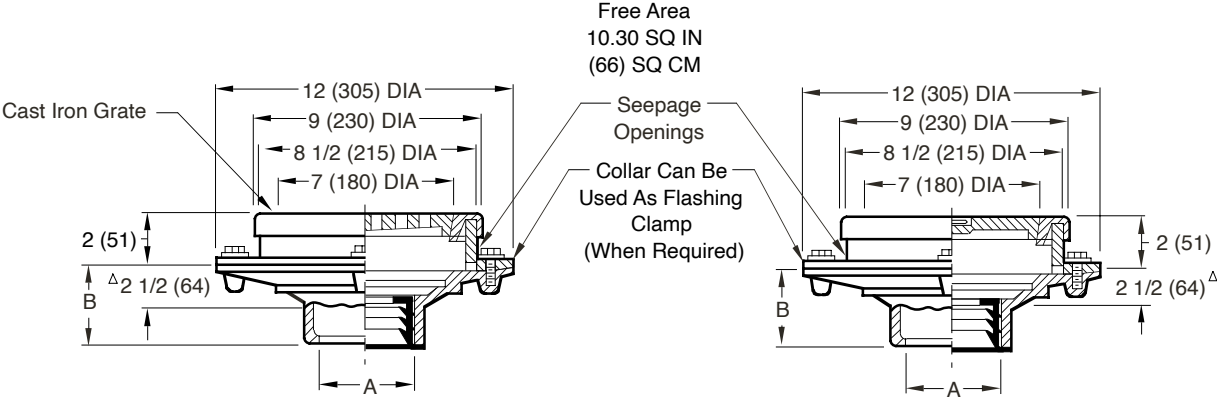
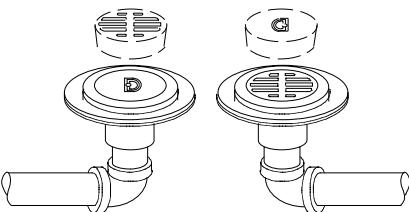


H	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com	  	LOCATION				
			FLOOR DRAINS				
			DECONTAMINATION DRAINS				
							
			Fig. 9205C CAULK OUTLET Fig. 9205Y NO-HUB OUTLET <table><tr><td>A SIZE</td><td>02(50), 03(75) & 04(100)</td></tr><tr><td>B</td><td>3 3/4 (95) for Caulk, NO-HUB and Speedi-Set®. 2 (51) for Threaded</td></tr></table> NOTE: Dimensions shown in parentheses are in millimeters. ΔThis dimension to Internal Stop of Speedi-Set® Gasket  TYPICAL INSTALLATION Drains are located close to each other for ease of switching grate and plug.				A SIZE
A SIZE	02(50), 03(75) & 04(100)						
B	3 3/4 (95) for Caulk, NO-HUB and Speedi-Set®. 2 (51) for Threaded						
REGULARLY FURNISHED: Two (2) Duco Cast Iron Bodies with Flashing Collar and Bronze Rim. Cast Iron Grate and Ground Joint Plug.		VARIATIONS: Engraved in Rims "SANITARY" and "CONTAMINATED" L Speedi-Set® Service Weight LXH Speedi-Set® Extra Heavy T Threaded Outlet		OPTIONAL MATERIALS: Acid Resistant Coated -ARC Bronze Grate and Plug -RB Galvanized Cast Iron -G Ductile Iron Grate and Plug -M			
9205	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE		WEIGHT POUNDS		VOLUME CUBIC FEET	FIGURE NUMBER	
	REV.	DATE	DESCRIPTION	BY	CKD. BY	9205	