



SPECIAL PURPOSE DRAINS

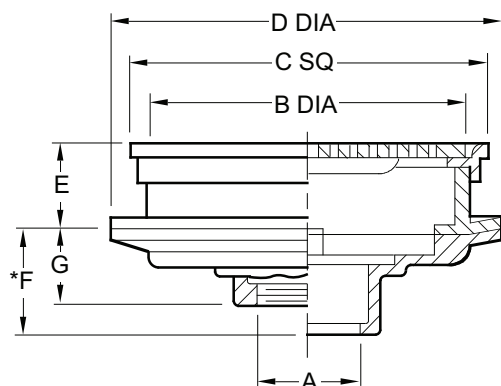

- Anchor o
- Flashing
- Flange

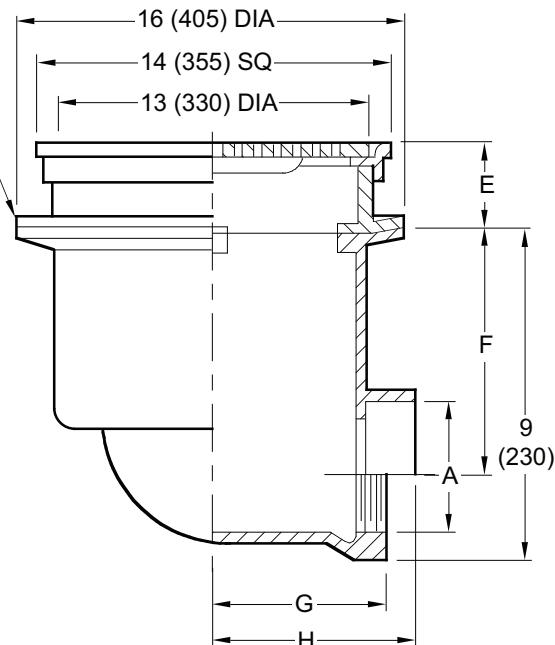

- | | |
|--|----------------------------------|
| | Fig. 6010C . . . CAULK OUTLET |
| | Fig. 6010T . . . THREADED OUTLET |
| | Fig. 6020C . . . CAULK OUTLET |
| | Fig. 6020T . . . THREADED OUTLET |

Fig. No.	A SIZE	B DIA	C SQ	D DIA	E	F *	G	Free Area
6010	02(50), 03(75), 04(100)	7 1/2 (190)	8 1/2 (215)	11 1/2 (290)	1 3/4 (44)	3 3/4 (95)	2 (51)	13 SQ IN (84) SQ CM
6020	04(100), 05(125), 06(150)	12 3/4 (325)	14 (355)	15 3/4 (400)	2 1/2 (64)	3 3/4 (95)	3 3/4 (95)	42 SQ IN (271) SQ CM

* Same Dimension for Caulk or NO-HUB

- | | |
|--|----------------------------------|
| | Fig. 6025C . . . CAULK OUTLET |
| | Fig. 6025T . . . THREADED OUTLET |

A SIZE	E	F	G	H	Free Area
04 (100)	2 1/2 (64)	5 7/8 (149)	6 (150)	6 3/4 (170)	42
05 (125)	2 1/2 (64)	5 (125)	6 5/8 (168)	7 3/4 (195)	SQ IN (271)
06 (150)	2 1/2 (64)	4 1/2 (115)	6 7/8 (175)	7 3/4 (195)	SQ CM

NOTE: 04" (100) size requires a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 05" (125) & 06" (150) sizes.

REGULARLY FURNISHED:

Fig. 6010 - Duco Cast Iron Body and Anchor Flange with Secured Chrome Plated Bronze Grate and Frame.

Fig. 6020 and 6025 - Duco Cast Iron Body and Anchor Flange with Secured Nickel Plated Bronze Grate and Frame.

VARIATIONS:

- ☐ NO-HUB Adaptor
(Specify Fig. 2646Y)
(6020, 6025 only)
- ☐ Vandal Proof Screws -U
- ☐ Y NO-HUB Outlet (6010 only)

OPTIONAL MATERIALS:

- | | |
|--------------------------|--|
| ☐ | Duco Cast Iron Grate -CI
(Fig. 6010 only) |
| ☐ | Galvanized Cast Iron -G |
| ☐ | Nickel Bronze Top -NB |
| ☐ | Polished Bronze Top -PB |

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

H G F E	11-12-25 3-19-25 12/16/08 12/08/08	Revised Regularly Furnished Revised Chart Revised Chart Revised Variations	TB HS RN RN	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 6010,6020,6025
REV.	DATE	DESCRIPTION	BY	CKD. BY			

