SMITH® JAY R. SMITH MFG. CO.®
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com
CUSTOMER DRIVEN SINCE 1926

MEMBER OF:

LOCATION

GENERAL PURPOSE FLOOR DRAIN

14"(356) SQUARE TOP

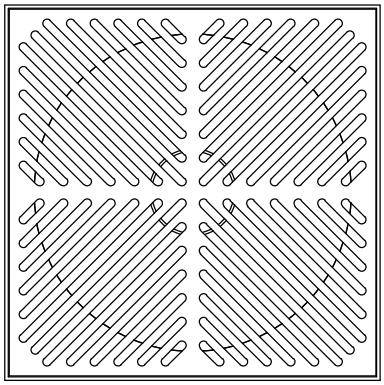

FREE AREA
73.31 SQ IN
(472.96 SQ CM)

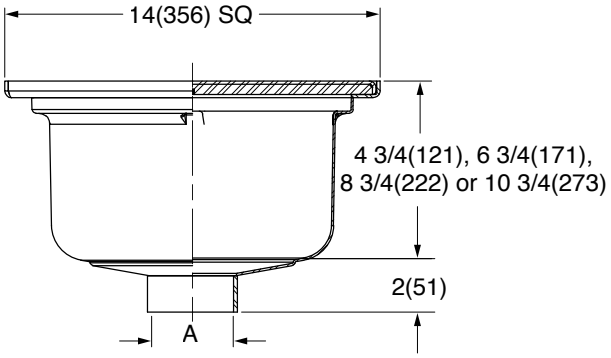

USDA ACCEPTED

NSF

ASME A112.6.3 &
CSA B79
Certified Light Duty
Load Rating

UPC
C ®
File No. 3663

A (Pipe Size) = 02(50), 03(75), 04(100) or 06(150)

	4 3/4"(121) DEEP	6 3/4"(171) DEEP	8 3/4"(222) DEEP	10 3/4"(273) DEEP	
Fig. ☐	9635BW -S	☐ 9636BW -S.....	☐ 9637BW -S	☐ 9638BW -S	**BUTTWELD OUTLET▲**
Fig. ☐	9635T -S	☐ 9636T -S	☐ 9637T -S	☐ 9638T -S.....	**THREADED OUTLET**
Fig. ☐	9635Y -S	☐ 9636Y -S	☐ 9637Y -S.....	☐ 9638Y -S.....	**NO-HUB OUTLET**

▲Schedule 40 Regularly Furnished

REGULARLY FURNISHED:
14 Gauge Type 304 Stainless Steel Body and Loose Set Heel Proof Slotted Grate with No. 4 Finish.

VARIATIONS:
- ☐ Anchor Flange -F
- ☐ Flange & Flashing Clamp -FC
- ☐ Sediment Bucket -B
- ☐ Dome Bottom Strainer -DBS
- ☐ Vandal Proof Grate -U
- ☐ 1/2"(13) Trap Primer Connection -P050
- ☐ USDA Compliant

OPTIONAL MATERIALS:
- ☐ Type 316 Stainless Steel -316

SUBJECT TO MANUFACTURING TOLERANCE AND CHANGE WITHOUT NOTICE.

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY
E	12-13-21	Added ASME and CSA numbers	KK	CL
D	6-9-2020	Revised Regularly Furnished	MW	CL
C	5-17-18	Revised Variations, Added Note	TBW	CL
B	4-24-17	Added cUPC	TBW	CL

WEIGHT POUNDS | VOLUME CUBIC FEET | **FIGURE NUMBER 9635 -S - 9638 -S**

FIGURE NUMBER: 9635 -S - 9638 -S
DRAWN BY: TBW
CHECKED BY: CL
APPROVED BY: JM
DATE: 7-9-14
SCALE: NONE
SIZE: A
DRAWING NUMBER: S9635-S-9638-S
E

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov